


CLOW
VALVE CO.

ClowValve.com

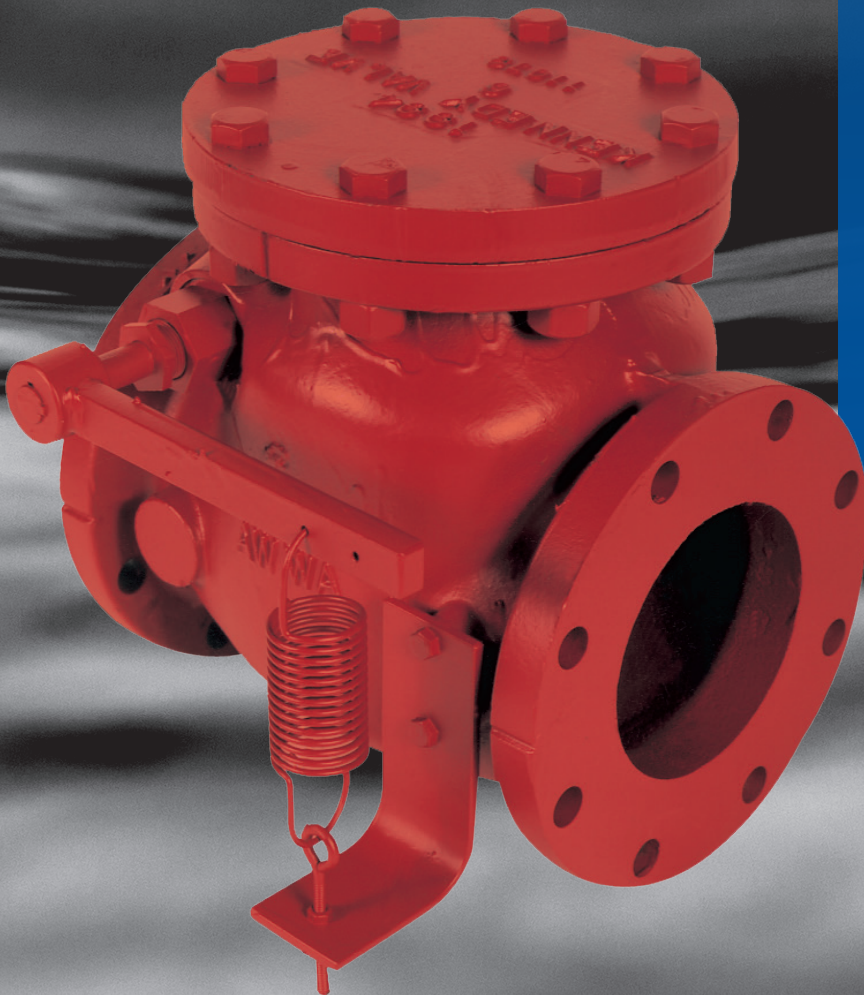

INCREASING CHECK VALVE

200 PSI WORKING PRESSURE • 400 PSI TEST PRESSURE
• RESILIENT SEAT RING • AVAILABLE IN EITHER PLAIN,
LEVER & SPRING, OR LEVER & WEIGHT • FIG. 306A,
306AS AND 306AW




Clow Valve, A Division of McWane, Inc.

For Generations

INCREASING CHECK VALVE FEATURES

- Utilizes same components as the 106 Swing Check Valve
- 200 PSI working pressure / 400 PSI test pressure
- Available in sizes: 4 x 6, 4 x 8, 6 x 8, 6 x 10, 8 x 10, 8 x 12, 10 x 12
- Resilient seat (rubber disk, bronze seat) ring
- Available in either Plain, Lever & Spring, or Lever & Weight

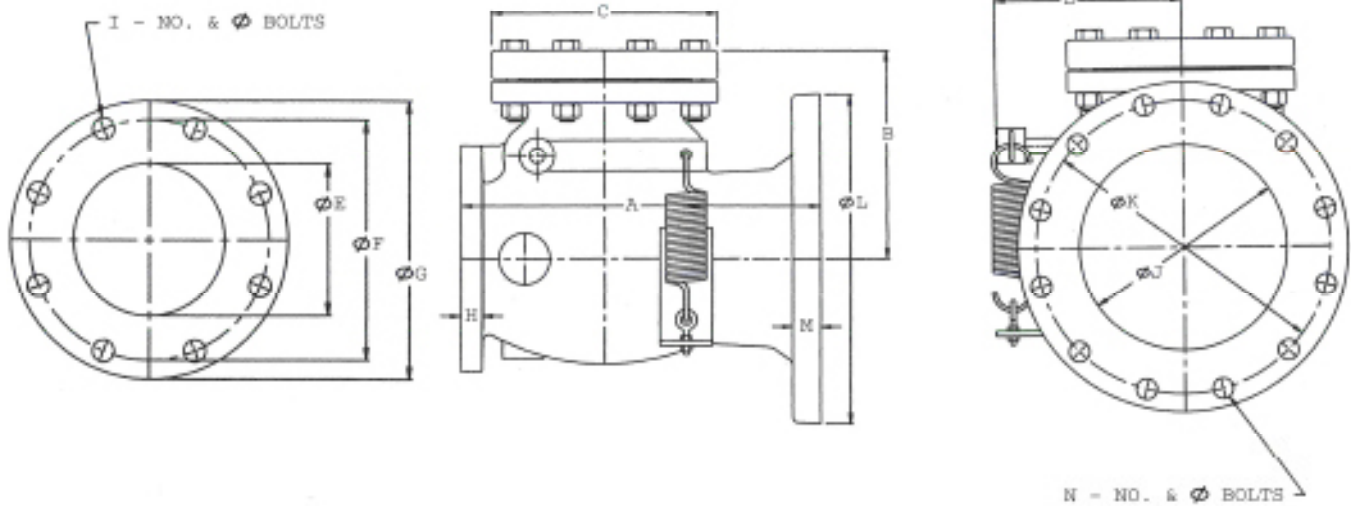

INCREASING CHECK VALVE DIMENSIONS

All dimensions in inches.

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N
4x6	13.50	8.31	9	8.19	4	7.50	9	0.94	8-0.63	6	9.50	11	1	8-0.75
4x8	15	8.31	9	8.19	4	7.50	9	0.94	8-0.63	8	11.75	13.50	1.13	8-0.75
6x8	17	10.06	11	9	6	9.50	11	1	8-0.75	8	11.75	13.50	1.13	8-0.75
6x10	17.50	10.06	11	9	6	9.50	11	1	8-0.75	10	14.25	16	1.19	12-0.88
8x10	20	12.38	13.50	10.19	8	11.75	13.50	1.13	8-0.75	10	14.25	16	1.19	12-0.88
8x12	21	12.38	13.50	10.19	8	11.75	13.50	1.13	8-0.75	12	17	19	1.25	12-0.88
10x12	22.50	13.93	16.75	11.63	10	14.25	16	1.19	12-0.88	12	17	19	1.25	12-0.88



ISO 9001:2008 Certified

ISO 14001:2004 Certified

COMMITTED TO ENVIRONMENTAL RESPONSIBILITY

Clow Valve Company is committed to protecting our natural resources through environmentally responsible manufacturing practices, including the use of 80+% recycled content in our hydrants and valves.



CLOW
VALVE CO.

902 South 2nd Street
Oskaloosa, IA 52577
Ph 641-673-8611
Fx 641-673-8269



POCKET ENGINEER
Available for iOS + Android
or online at pe.mcwane.com.



REVISION A-2018



ClowValve.com